


FIG 602 - BALL VALVE SINGLE UNION THREADED

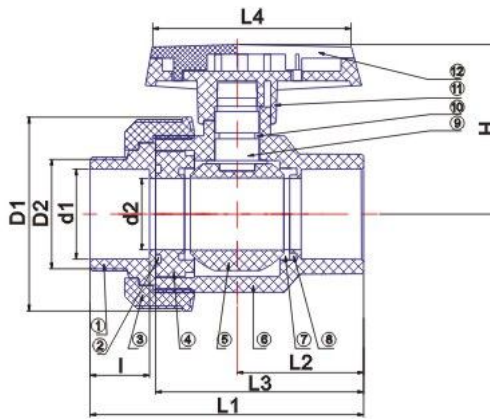

No.	PART	MATERIAL
1	End Connector	PVC
2	Carrier O-Ring	EPDM
3	Union Nut	PVC
4	Seal Carrier	PVC
5	Ball	PVC
6	Body	PVC
7	Seat Seal	PTFE
8	O-Ring	EPDM
9	Stem	PVC
10	Stem O-Ring	EPDM
11	Handle	ABS

CODE	SIZE BSP	METRIC mm	d1	d2	D2	D1	I	L1	L2	L3	L4	H
602/0015	1/2"	15	20	14	27.6	51.3	20.6	95.8	25.3	67.3	65	49.5
602/0020	3/4"	20	25	18.7	35.2	65.5	25	111.4	32.4	78.3	74.9	56.5
602/0025	1"	25	32	24	41.6	73.7	27.9	121.5	49.5	85.9	85	65
602/0032	1 1/4"	32	40	32	49	86.6	27	130	57	99	97.1	76.5
602/0040	1 1/2"	40	50	40	60.8	102	34.5	157.5	69.0	113.5	109.7	86.5
602/0050	2"	50	63	50	74.5	120	40	190	81	136.5	190	102
602/0065	2 1/2"	65	75	60	89	135	40	210	95.9	156	161	113.5
602/0080	3"	80	90	79	107.5	188	48	254.6	120.9	196.5	199.4	161.5
602/0100	4"	100	110	99	132	215.5	56	294	140.7	225	240	174

TECHNICAL DATA:

Maximum Working Pressure:	Up to 10 BAR (145 PSI)
Temperature range:	0°C - +50°C
Material:	PVC, ABS

SUN RESISTANT UV stabilised
EXTRA STRENGTH Robust construction
PROVEN DURABILITY Manufactured to DIN8063 standards